



P.S.I. IN INCHES OF WATER

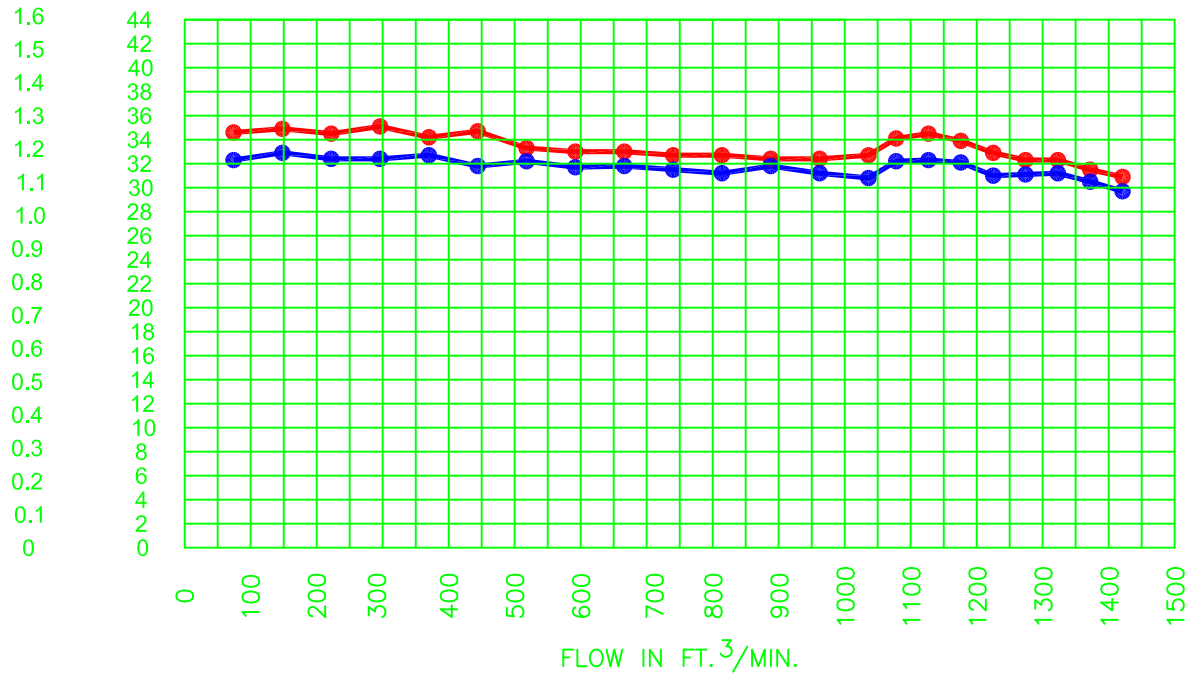

Curve for Pressure Side of SUPERAC 6" High Velocity PV Valve - 1.2 PSI
data based on air flow

BARRELS PER HOUR	FLOW FT. ³ / MIN.	PRESSURE IN INCHES OF H ₂ O	
		LID CLOSED	LID OPEN
791	74	34.6	33.3
1572	147	34.9	32.9
2363	221	34.5	32.4
3144	294	35.1	32.1
3924	367	34.2	32.7
4716	441	34.7	31.8
5496	514	31.3	32.2
6288	588	33.0	31.7
7068	661	33.0	31.8
7860	735	32.7	31.5
8640	808	32.7	31.2
9432	882	32.4	31.8
10212	955	32.4	31.2
11004	1029	32.7	30.8
11528	1078	34.1	32.2
12052	1127	34.5	32.3
12576	1176	33.9	32.1
13100	1225	32.9	31.0
13624	1274	32.3	31.1
14148	1323	32.3	31.2
14672	1372	31.5	30.5
15196	1421	30.9	29.7



ELECTROMECHANICAL RESEARCH LABORATORIES, INC.
P.O. 1026 NEW ALBANY, IN 47150

DATE 10/12/93

DRAWN D. URBAN

PART NAME 1.2 Flow Curve, Pressure

TOLERANCES
.0= +/- .030
.00= +/- .015
.000= +/- .005

APPROVED

UNIT NAME Marine 6" PV Valve

SCALE JOB NO.

DRAWING NO. 285E085B ITEM NO.